



EN 149:2001+A1:2009 protective devices. Filtering half masks to protect against particles. Requirements, testing, marking

Product: Protective Mask

Report No.: PTC21022604701C-EN01

Client: Anhui Sunshine Home Textile Co., LTD.

Client Address: Fangang town east industrial park, Tongcheng City, Anhui Province,

China

Manufacturer: Anhui Sunshine Home Textile Co., LTD.

Manufacturer Address: Fangang town east industrial park, Tongcheng City, Anhui Province,

TIFICATION

China

Contact: Zhang Chi

Model(s): ZC-2021

Classification: FFP2 NR

Date of Tests: 2021.03.01~2021.03.05

Signed for and on Behalf of PTC

Prepare by: Checked by:

lim Mo

Approved by:



Summary of assessment

Clause	Assessment
7.3 Visual inspection	NOT TESTED
7.4 Packaging	PASS
7.5 Material	PASS
7.6 Cleaning and disinfecting	N/A
7.7 Practical performance	PASS
7.8 Finish of parts	PASS
7.9.1 Total inward leakage	PASS
7.9.2 Penetration of filter material	PASS
7.10 Compatibility with skin	PASS
7.11 Flammability	PASS
7.12 Carbon dioxide content of the inhalation air	PASS
7.13 Head harness	PASS
7.14 Field of vision	PASS
7.15 Exhalation valve	N/A
7.16 Breathing resistance	PASS
7.17 Clogging	N/A
7.18 Demountable parts	O O N/A
9 Marking	NOT TESTED

Remark:

PASS: comply with requirement of standard

N/A: not application

NOT TESTED: the clause were not required

This report is issued according to the general clauses in www.pto-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted.

The report could not be copied without permission



Test Result:

no sharp edges or burrs.

Requirement	Test Result	Conclusion
7.3 Visual inspection		
The visual inspection shall also include the marking and the information supplied by the manufacturer.	Not tested	Not tested
7.4 Packaging		
Particle filtering half masks shall be offered for sale packaged in such a	In accordance	' Ko Ko
way that they are protected against mechanical damage and	with the	Pass
contamination before use.	requirement.	
7.5 Material		
Materials used shall be suitable to withstand handling and wear over the		
period for which the particle filtering half mask is designed to be used.	No mechanical failure after	
Any material from the filter media released by the air flow through the	undergoing the	
filter shall not constitute a hazard or nuisance for the wearer.	conditioning	
	described in	Pass
After undergoing the conditioning described in 8.3.1 none of the particle	8.3.1, No collapse when	
filtering half masks shall have suffered mechanical failure of the facepiece	conditioned in	
or straps.	accordance with	
	8.3.1 and 8.3.2.	
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering	20 20 20 20	
half mask shall not collapse.		
7.6 Cleaning and disinfecting		
If the particle filtering half mask is designed to be re-usable, the	Cinalo obift use only	N/A
materials used shall withstand the cleaning and disinfecting agents and	Single shift use only	N/A
procedures to be specified by the manufacturer.		
7.7 Practical performance		
The particle filtering half mask shall undergo practical performance tests	No imperfections	Pass
under realistic conditions		
7.8 Finish of parts	No sharp edges or	
Parts of the device likely to come into contact with the wearer shall have	burrs.	Pass
no sharn edges or hurrs		

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted.

The report could not be copied without permission



7.9.1 Total inward leakage

For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than 25 % for FFP1, 11 % for FFP2, 5 % for FFP3

and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than 22 % for FFP1, 8 % for FFP2, 2 % for FFP3.

	FFP2, Test		
	results are		
sl	hown in Annex	(2)	Pass
	A Table		
	7.9.1-A&B		

7.9.2 Penetration of filter material

The penetration of the filter of the particle filtering half mask shall meet the requirements of Table 1.

-20 -20	Sodium chloride test	Paraffin oil test 95
	95 l/min	l/min
FFP1	≤ 20%	≤ 20%
FFP2	≤ 6%	≤ 6%
FFP3	≤ 1%	≤ 1%

FFP2 , Test
results are
shown in Annex
A Table 7.9.2.

7.10 Compatibility with skin

Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.

No irritation or	
any other	Pass
adverse effect to	rass
health.	

7.11 Flammability

When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.

Test results are	
shown in Annex A	F
Table 7.11.	

7.12 Carbon dioxide content of the inhalation air

The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)

Test results are	Page
shown in Annex A	Pass
Table 7.12.	

7.13 Head harness

The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.

Head harness can be donned and removed easily, adjustable or self-adjusting and

Pass

The head harness shall be adjustable or self-adjusting and shall be

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted.

The report could not be copied without permission



sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.

have sufficiently robust to hold the particle filtering half mask firmly.

7.14 Field of vision

The field of vision is acceptable if determined so in practical performance tests

Pass the practical performance tests.

Pass

7.15 Exhalation valve

A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.

If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.

No exhalation valve

Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.

When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.

7.16 Breathing resistance

Classification	Maximum permitted resistance (mbar)			
	Inhal	Exhalation		
	30 l/min	95 l/min	160 l/min	
FFP1	0.6	2.1	3.0	
FFP2	0.7	2.4	3.0	
FFP3	1.0-	3.0	3.0	

FFP2. Test results are shown in Annex A Table 7.16.

Pass

7.17 Clogging

7.17.2 Breathing resistance

Valved particle filtering half masks:

After clogging the inhalation resistances shall not exceed:

FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow

The exhalation resistance shall not exceed 3 mbar at 160 L/min

Single shift use only.

N/A

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted.

The report could not be copied without permission



continuous flow

Valveless particle filtering half masks

After clogging the inhalation and exhalation resistances shall not exceed: FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow

7.17.3 Penetration of filter material

	Sodium chloride test	Paraffin oil test 95
	95 l/min	J/min
FFP1	≤ 20%	≤ 20%
FFP2	≤ 6%	≤6%
FFP3	≤ 1%	≤ 1%

7.18 Demountable parts

All demountable parts (if fitted) shall be readily connected and secured, where possible by hand

No demountable parts.

Not tested

N/A

Not tested

9 Marking

9.1 Packaging

The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.

- 9.1.1 The name, trademark or other means of identification of the manufacturer or supplier.
- 9.1.2 Type-identifying marking.
- 9.1.3 Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable.

Example: FFP2 R D.

- 9.1.4 The number and year of publication of this European Standard.
- 9.1.5 At least the year of end of shelf life. The end of shelf life may be informed by a pictogram as shown in Figure 12a, where yyyy/mm indicates the year and month.
- 9.1.6 The sentence 'see information supplied by the manufacturer', at least in the official language(s) of the country of destination, or by using

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted.

The report could not be copied without permission



the pictogram as shown in Figure 12b.

- 9.1.7 The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.
- 9.1.8 The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D". This letter shall follow the classification marking preceded by a single space.

9.2 Particle filtering half mask

Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:

- 9.2.1 The name, trademark or other means of identification of the manufacturer or supplier.
- 9.2.2 Type-identifying marking.
- 9.2.3 The number and year of publication of this European Standard.
- 9.2.4 Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

- 9.2.5 If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the classification marking preceded by a single space.
- 9.2.6 Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.



Annex A: Summarization of Test Data

Table 7.9.1-A: Inward Leakage Test Data

Test specification: EN 149:2001+A1:2009 Clause 8.5

Subject	Sample No.	Condition	Walk (%)	Head Side/side (%)	Head up/down (%)	Talk (%)	Walk (%)	Mean (%)
Lv	1	A.R	5.5	4.9	2.8	5.8	6.5	5.1
é Li é	2	A.R	6.3	6.9	6.4	7.5	7.9	7.0
Zhong	3	A.R	2.9	2.9	2.6	2.6	2.7	2.7
Xu	4	A.R	4.0	2.5	2.5	2.3	2.1	2.7
Ma	5	A.R	4.0	2.6	2.9	3.7	3.6	3.4
Chen	6	T.C	4.1	3.3	2.9	2.7	2.2	3.0
Chen	070	T.C	2.0	2.7	2.6	2.7	2.8	2.6
Zhuo	8	T.C	2.3	2.2	3.1	4.1	2.5	2.8
Chen	9	T.C	7.1	5.2	4.7	4.2	4.6	5.2
Zhang	10	T.C	3.5	3.0	2.9	3.3	4.1	3.4

Table 7.9.1-B: Facial dimension

Subject	Face Length	Face Width	Face Depth	Mouth Width
Lv	113	139	104	53
C Karko	120	135	112	55
Zhong	108	135	106	56
Xu	120	150	120	70
Ma	130	170	130	80
Chen	110	160	90	40
Chen	115	145	110	50
Zhuo	103	146	100	50
Chen	110	145	95	40
Zhang	144	141	101	54



Table 7.9.2: Penetration of filter material

Test specification: EN 149:2001+A1:2009 Clause 8.11

Aerosol	Condition	Sample No.	Penetration (%)	Assessment
NO NO NO S	to the ten the ten	A1 A	0.1	The sto sto
0 0 0	As received	12	0.1	0 0 0
	and the tenth of the	13	0.1	4, 4, 4,
x0 x0 x0 ,	0 X0 X0 X0 X0	0 140	0.10	XO XO X
Sodium chloride test	Simulated wearing treatment	15	0.2	8. 8. 8.
No No No 3	to the the the	16	0.2	No No No
		17	0.1	
4° 4° 4° 4	Mechanical strength + Temperature conditioned	18	0.1	\$ \$ \$ \$
20 20 20 ,	Temperature conditioned	0 19	0.10	XO XO X
6, 6, 6, 6	, 6, 6, 6, 6,	20	0.1	Pass
NO NO NO S	As received	21	0.10	No No N
		22	0.1	
6° 6° 6° 6	a see see see see	23	0.1	40 40 40
Paraffin oil test	Simulated wearing treatment	24	0.10	25 OX OX
6, 6, 6, 6	, 6, 6, 6, 6,	25	0.1	6, 6, 6,
NO NO NO A	to to to to to	26	0.4	NO NO NO
Z Z Z Z	Mechanical strength +	27	0.3	- X X
	Temperature conditioned	28	0.4	40 40 41



Table 7.11: Flammability

Test specification: EN 149:2001+A1:2009 Clause 8.6

Condition	Sample No.	Result	Assessment			
As received	29	No burn	a sec sec sec sec			
As received —	30	No burn	0 00 00 00 00 00			
Tomporature conditioned	31	No burn	Pass			
Temperature conditioned	32	No burn	6, 6, 6, 6,			

Table 7.12: Carbon dioxide content of the inhalation air

Test specification: EN 149:2001+A1:2009 Clause 8.7

Condition	Sample No.	AC AC R	Assessment		
40 40 40	33	0.05			
As received	34	0.05	Mean value:	Pass	
of of of	35	0.05	0.05		



Table 7.16: Breathing resistance (mbar)

Test specification: EN 149:2001+A1:2009 Clause 8.9

6, 6,	Flow Rate		0		36			6,		37			6		38		
Inhalation 30 I/min			کے ت	0 /	0.37	KO .	20	NO.	20	0.36	~0	× (5 ~	0 /	0.38	KO .	20
As received	innaiation	95 I/min	-, ×	Α	1.21		Υ	X C	Υ	1.21	×	× (· · ·	о X	1.25		5
4 4	Exhalation	160	Α	В	С	D	E	Α	В	С	D	E	Α	В	С	D	E
20 20	Exhalation	l/min	1.77	1.77	1.73	1.77	1.71	1.74	1.78	1.69	1.70	1.72	1.74	1.78	1.78	1.72	1.74
Flow Rate		,)		39			Lo		40					41			
Simulated	imulated July 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2		6	(0.34		6	()	8	0.34	6	6,	6	. 6	0.33		5
wearing treatment	Inhalation	95 I/min		0 6	1.23	KO,	é/C	é CO	\$10	1.18	\$ C	6/		C é	1.22	KO (50
ueaunent	Exhalation		Α	οВ	СС	D	χĒ	Α	В	С	D	E	Α	В	CC	D	χĒ
8, 8,	Exnaiation	l/min	1.68	1.69	1.71	1.67	1.68	1.69	1.69	1.66	1.66	1.65	1.68	1.71	1.67	1.67	1.67
Sto Sto	Flow Rate		J &	O	42	KO ,	STO.	€XO	\$10	43	6/10	1	1	O é	44	, O	2/0
30 l/min		30 I/min	5 _X	G ,	0.32	χO	χO.	χO	70	0.32	70	1 1	5 1	G ,	0.32	χO.	20
Temperature conditioned	Inhalation 95		. 8	~ ~	1.11		Υ	Υ	4	1.08	4	8	Α.	~ ~	1.10		Z
Ser Ser	Exhalation	160	Α	В	С	D	ξĒ	Α	В	С	D	E	Α	В	С	D	E
X6 X6	Extidiation	l/min	1.58	1.55	1.56	1.54	1.54	1.54	1.53	1.53	1.56	1.53	1.57	1.57	1.56	1.57	1.54
Assessment	- X	_ <	. 4	_ <			<	Pa	ss	_	× .	*	×	_ <			Ś

A: Facing directly ahead B: Facing vertically upwards C: Facing vertically downwards




Test	Uncertainty
Total inward leakage	3.8%
Penetration of filter material(NaCl)	3.5%
Penetration of filter material(Paraffin oil)	4.2%
Carbon dioxide content of the inhalation air	4.5%
Breathing resistance(30L/min)	5.2%
Breathing resistance(95L/min)	5.4%
Breathing resistance(160)L/min)	6.0%

Photo(s) of Sample:







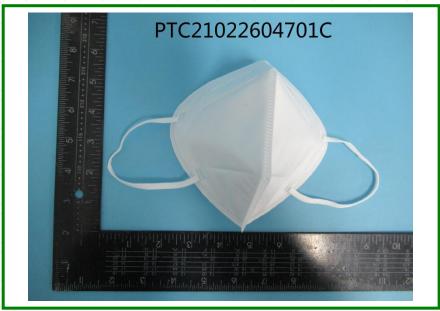





End of Report